BRETFORD®

PureCharge Pro™ Tray

User Guide

About Your Product

Product Overview - Front View

The **PureCharge Pro™ Tray** provides pro-grade charging and organization for up to 10 devices.

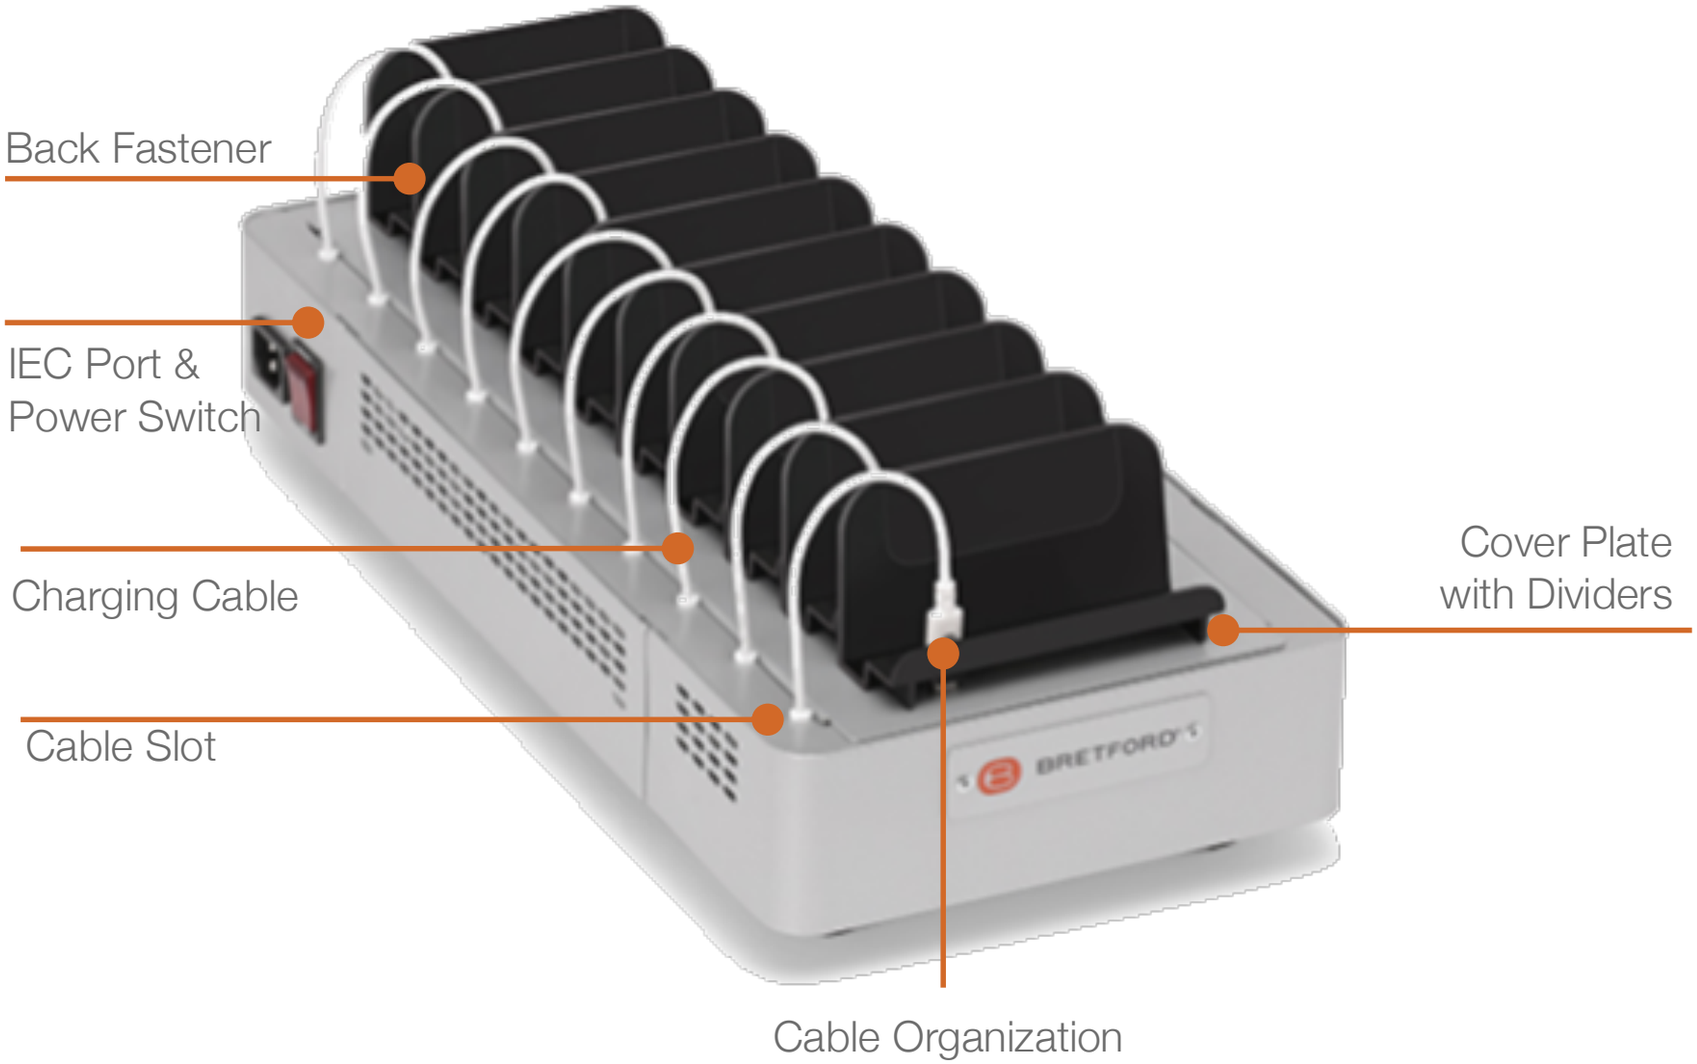

About Your Product

Technical Specifications

	PureCharge Pro™ Tray
Model	PCPDT5-PM PureCharge Pro™ Tray 5 Bay PCPDT5C-PM PureCharge Pro™ Tray 5 Bay USB-C Pre-Wired PCPDT10-PM PureCharge Pro™ Tray 10 Bay PCPDT10C-PM PureCharge Pro™ Tray 10 Bay USB-C Pre-Wired
Outer Dimensions (W x D x H)	5 Bay: 8.5 x 10.34 x 6 in. / 21.59 x 26.26 x 15.24 cm 10 Bay: 8.5 x 18.25 x 6 in. / 21.59 x 46.36 x 15.24 cm
Slot Dimensions	∞ x 1.5 x ∞ in./ ∞ x 3.81 x ∞ cm
Capacity	5/10 Phone, Tablet or POS devices
Weight (empty)	PCPDT5/C 7 lbs / 3.2 kg PCPDT10/C 11 lbs / 5 kg
Rating	AC: 100-240V / 2.8A / 50/60Hz DC: Up to 20V ⎓ 5A
Charging	Supports devices up to 30W each
Warranty	For the latest information, please visit bretford.com/warranty.
Certifications	ETL Listed to UL 62368-1

Using Your Product

PureCharge Pro™ Tray

PureCharge Pro™ Tray Wiring

Pre-Wired models come equipped with USB-C to USB-C cables preinstalled.

For non pre-wired models, the units are compatible with USB-C to connector cables (i.e. USB-C to USB-C cables, USB-C to Lightning cables, etc). Recommended length to use is 12 in.

To install the cables:

1. Use a torx head screwdriver to remove the fastener from the back of the unit. Slide the cover piece with dividers back and remove.

2. Install the USB-C side of the cable into the charging board and rout a cable for each slot. For the 10 bay, plug in 5 cables per charging board.

Using Your Product

PureCharge Pro™ Tray

3. Reinstall the cover by installing the tab in front first and then slide the cover towards the front. Secure the fastener in the back

PureCharge Pro™ Tray Cable Organization

When the cables are not plugged into a device, USB-C and Lightning cables can be organized in the divider slot

Using Your Product

CUBE Cart Max™

Turning On

Plug in the IEC power cable in the side of the unit and plug into an outlet. There is a power switch next to the IEC port. Flip the power switch to ‘Reset’ to turn on the unit.

Important Information

Safety Notice

- Product for indoor use only
- Ensure the power switch is in the OFF position and PureCharge Pro™ Tray is disconnected from the wall outlet before plugging devices into the charging hub.
- Do not plug the unit in if the switch or power cord has been damaged.
- Unplug unit from the wall before moving to a different location.
- The socket-outlet shall be installed near the equipment and shall be easily accessible.
- For safety purposes, make sure all electrical components do not exceed the maximum load rating of 12 amps.
- This product must be connected to a properly grounded (earthed) electrical outlet before connecting devices for charging. Failure to ensure proper grounding may result in electric shock or equipment damage.

Additional Resources

Contact Support

Technical support is available by contacting Bretford Customer Care via phone, email or the web:

Hours of Operation: M-F, 7:30am - 4:30pm CST

Telephone: +1-800-521-9614

Email: customerservice@bretford.com

Website: www.bretford.com/contact

Bretford and PureCharge Pro™ are trademarks or registered marks of Bretford Manufacturing, Inc. Patents pending. © 2025 Bretford Manufacturing, Inc. All rights reserved.